


# WT-187 User Manual

Thank you for purchasing this power bank. Please read the manual carefully before use, and keep it for reference in the future.

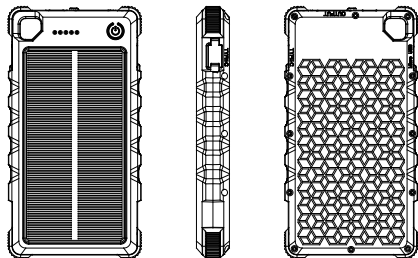

## Specifications:


Capacity	10000mAh
Micro Input	DC 5V 2A Max
Type-C Input	DC 5V 3A Max
USB Output	DC 5V 3A Max
Type-C Output	DC 5V 3A Max
Product size	141*76.8*19 / mm
Product net weight	236.55g
Full charging time	6 hours
Operation temperature	0~45 (°C)
Battery type	Rechargeable Li-polymer battery
Flashlight	0.5W/55LM
Solar Panels Input	5V,250mA

**Accessory List :** User Manual, Charging Cable, Power Bank

## Product Features:

- **IP66:** Rainproof, dustproof ,shockproof, designed for outdoor sport lover. It will be very helpful when traveling, climbing, swimming, bicycling.
- **10000mAh capacity:** 4 blue indicators for power status.
- **Button:** Long press the button to turn on the LED mode, the same operation to turn it off.
- Anti-skipping by the side with better touch feeling .
- USB\*1; TYPE-C\*1; Micro USB\*1
- Battery cell temperature protection and PCBA short circuit protection.
- 4 angles with soft TPU design for better protection.

## Specification:

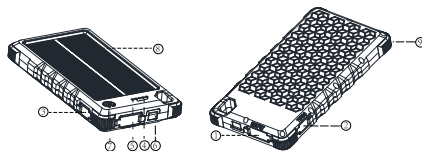

1. USB Output: DC 5V 3A Max
2. Type-C Output: DC 5V 3A Max / Input: DC 5V 3A Max
3. Micro USB Input: DC 5V 2A Max
4. 4 indicators for power status
5. Solar panel indicator
6. LED light
7. Button: Long press the button to turn on the LED mode, the same operation to turn it off
8. Solar panel
9. 4 angles with soft TPU design

## Operating Instructions :



Micro Input views

Type-C Input views



USB Output views

Type-C Output views

1. Connect the charger by provided cable of USB-A port and connect your power bank the end of cable for charging the power bank. Please kindly choose the charger which voltage between 5.0V-5.5V.
2. Charging device: Open the cap of the USB/Type-C, connect the USB-A end to one of the output ports on the power bank. Power bank will charge your device automatically once the cable is connected.
3. Charging power bank: Open the cap of the USB/Type-C, connect the larger end of the the USB cable provided to your PC or (a USB power adapter not provided) and the Micro USB end to power bank. (Notice: For charging power bank, it don't support charging and discharging at the same time, Micro and Type-C can't charge devices at the same time.)
4. Long press the button to turn on the lighting mode
5. 4 LED indicators (next to the green indicator), first indicate 0~25%, second, 2 lighting LEDs indicate 25-50% capacity, 3 lighting LEDs indicate 50-75% capacity, 4 lighting LEDs indicate 75-100% capacity, LED indicators will remain on and stop flashing when power bank is fully charged.

Charging Status LED Indicators	0%-25%	25%-50%	50%-75%	75%-99%	100%
1st	Flashing Blue	●	●	●	●
2nd	OFF	Flashing Blue	●	●	●
3rd	OFF	OFF	Flashing Blue	●	●
4th	OFF	OFF	OFF	Flashing Blue	●

● Solid Blue

## How to Use the Power Bank to Charge Your Devices:

Connect the Power Bank to your device with the provided charging cable, it will start to charge your device automatically. The power bank will shut off in 32 seconds when no device is being connected with.

## Note:

1. The full charging time is only for your reference, please refer to actual operation.
2. High quality guarantee, using A-grade Li-polymer battery cell for this power bank , please be assured use.
3. Please use the matched charging cable according to your mobile phone and digital product.
4. It will cause slight heating due to electric consumption when charging and discharging, it's normal phenomenon.
5. Please store this power bank in a cool and dry place, if do not use for a long period, please fully charged this power bank at every 6 months interval.
6. Please find our suggestion to choosing regular 5V-2A charger to charge this charger, in order to ensure the stability of this product usage.
7. Please do not put together this power bank with metal or tool items, in order to avoid scratching surface or damage.
8. Don't leave this item out in your car to charge. Car's dashboard will become very hot from the sun and would ruining the internal battery.

## WARNING:

- DO NOT attempt to open or dismantle the product.
- DO NOT subject the power bank to naked flames or extreme heat.
- DO NOT stand on or otherwise apply pressure to the power bank.
- DO NOT allow children to play with the power bank.
- Whilst the device will charge in high temperatures please ensure the device never sits in direct sunlight for a prolonged period of time as the charger has a maximum temperature of 45°C (113°F).
- Stop using this power bank if it occur expansion or break down, and contact local distributor.
- Unless supervision and guided by professional man, and ensure safety of user, the following person are not suitable to use this power bank: people who degeneration on physical function or mental ability, people who lack of operating experience and lack of acknowledge of this power bank.